

WHY INTERNAL BALANCING ?

Balance truck and hard to balance tires the easy way, from the inside out!

Excellent for use with aggressive tread mudder tires

No more worries about having the correct heavy duty wheel weights, or if the wheel weights will stay on the wheel

Note: Alcoa wheel flanges become thinner with use - weights will not stay on worn wheels.



www.counteractbalancing.com

Includes long valve core with each bag
Use of a metal sealing valve cap is recommended
 Reference Application Chart for Actual Sizing

Bag Color	Part Number	Description	Bg/Cs
Light Green	CAB-4	Teflon Coated Glass	92
Application:	31/11.50-R15 * 265/75-R16 * 225/60-R17.5		
Aqua	CAB-5	Silicone Coated Glass	76
Application:	31/12.50-R15 * 265/85-R16 * 225/80-R17.5		
Orange	CAB-6	Silicone Coated Glass	64
Application:	33/16.50-R15 * 225/75-R17.5 * 245/70-R19.5		
Red	CAB-8	Silicone Coated Glass	52
Application:	11-R17.5 * 275/70-R19.5 * 265/75-R22.5		
Yellow	CAB-10	Silicone Coated Glass	40
Application:	11-R22.5 * 295/75-R22.5 * 315/75-R24.5		
Blue	CAB-12	Silicone Coated Glass	36
Application:	12-R22.5 * 345/75-R22.5 * 315/80-R22.5		




Includes filtered valve cores

Use of a metal sealing valve cap is recommended

Reference Application Chart for Actual Sizing



www.imiproducts.com

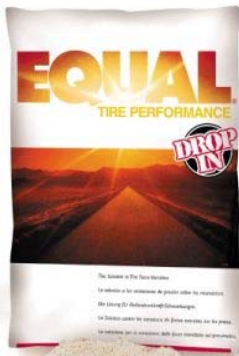

Part Number	Description	Bg/Cs
EQ-F-3oz	Plastic Polymer	40
Application:	33/11.50-R15 * 265/75-R16 * 225/60-R17.5	
EQ-E-4oz	Plastic Polymer	40
Application:	35/12.50-R15 * 265/85-R16 * 225/80-R17.5	
EQ-D-6oz	Plastic Polymer	40
Application:	36/16.50-R15 * 225/75-R17.5 * 245/70-R19.5	
EQ-C-8oz	Plastic Polymer	40
Application:	11-R17.5 * 275/70-R19.5 * 265/75-R22.5	
EQ-B-10oz	Plastic Polymer	40
Application:	11-R22.5 * 295/75-R22.5 * 315/75-R24.5	
EQ-A-12oz	Plastic Polymer	40